


Flexible Braiding

Flexible Braiding

Flexible Braiding is an easy to install, flexible solution for use with wiring harnesses.

Available in a number of different sizes and lengths, Flexible Braiding is resistant to abrasion, ozone, grease, oils and many chemicals and has an operating temperature of -70°C to 120°C.

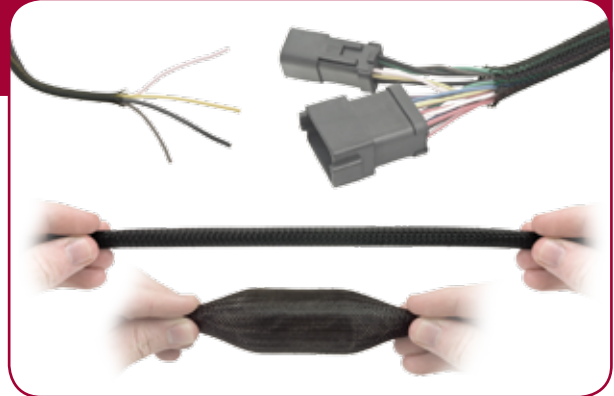

Salt, oil,
most fuels
and solvent
resistant



Extremely
flexible - easy
to apply over
irregular
shapes



UL
recognized



Extreme
operating
temperature
-70°C to +120°C



Highly
resistant to
abrasion



Open weave
construction
allows for
complete
drainage



Flexible Braiding Specifications

Material : Braided Polyethelene Terephthalate
Operating Temp : -70°C to +120°C
Flammability : UL225, method VW-1

Flexible Braiding			
Part No.	Normal Size - mm	Expanded size - mm	Roll Length - mm
SZ0310/10	3	10	10
SZ0310/25	3	10	25
SZ0310/250	3	10	250
SZ0620/15	6	20	15
SZ0620/100	6	20	100
SZ0620/300	6	20	300
SZ1230/10	12	30	10
SZ1230/100	12	30	100
SZ2040/5	20	40	5
SZ2040/50	20	40	50
SZ2560/5	25	60	5
SZ2560/50	25	60	50
SZ3070/5	30	70	5
SZ3070/50	30	70	50