

## Heatshrink Dispenser



Heatshrink Dispenser

## Strain Relief Sleeves



Heatshrink - Strain Relief Sleeves

## Standard Wall Heatshrink - Dispenser



- Convenient dispenser box, protects tubing while allowing access and less wastage.
- Flame retarded & self-extinguishing.
- Electrical insulation of up to 600 volts.
- Resistance to chemicals, copper corrosion, fungus and UV rays.
- Meet ROHS compliance.
- 2:1 shrink ratio.

Part Numbers:

20m Roll:

**DHS2.5BLK**

**DHS2.5RED**

**DHS3.5BLK**

**DHS3.5RED**

10m Roll:

**DHS5BLK**

**DHS5RED**

**DHS7BLK**

**DHS7RED**

**DHS10BLK**

**DHS10RED**

5m Roll:

**DHS13BLK**

**DHS13RED**

**DHS20BLK**

**DHS20RED**

**DHS25BLK**

**DHS25RED**

## Thick Wall Heatshrink - Strain Relief Sleeves




- Adhesive free for the first 15mm, providing a slip free surface for secure connector gripping.
- Provides effective & long lasting mechanical strain relief.
- Resistance to chemical, copper corrosion and fungus.
- High UV & abrasion resistance.
- Available in 2 sizes:
  - 27mm to 6mm recovered ID at 100mm cut length.
  - 43mm to 10mm recovered ID at 140mm cut length.
- 4.5:1 high shrink ratio.

Part Numbers:

**SRS27/6**

**SRS43/10**

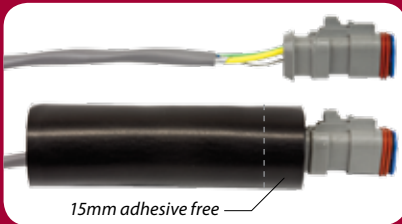

15mm adhesive free

Place Strain Relief Sleeve over cable as shown with the 15mm slip-free area covering part of connector.



Apply heat as you would to any standard heat shrink. The 15mm adhesive free area should grip to connector providing a reliable connection for the remaining shrink.



Strain Relief Sleeves shrink down to approximately 1/4 of original size.

## Similar products also available:

### Medium Wall Heatshrink - 1.2m



- Extremely tough & lightweight insulation providing higher degree of physical protection.
- High resistance to decay, chemicals, copper corrosion and ultra violet rays.
- Hot melt adhesive lining for environmental sealing.
- 3.5:1 shrink ratio.

Part Numbers:

**MW12**

**MW22**

**MW27**

**MW35**

**MW40**

**MW50**

**MW60**

**MW72**

16/09/09



For more info on the products listed above call toll free on: 1800 724 690  
or visit: [www.totalsource.com.au](http://www.totalsource.com.au)

**TS** TOTAL SOURCE